

**Surface Preparation :**

1. Before grouting, remove excess adhesive & debris from tile joints.
2. Clean the tile surface with a damp sponge to remove dirt, dust, adhesive & stains.

**How to Mix :**

3. Pour the contents of Part A & Part B into a clean pail.
4. Mix Part A & Part B thoroughly for 1 minute using a margin in trowel.

**How to Apply :**

5. Fill the tile joints with the Epoxy Grout using a rubber float.
6. Holding the rubber float perpendicular to the tiled surface, remove excess grout by drawing the float across the surface at 45° to the grouted joints. Be Sure to pack all joints full.

**How to Clean :**

7. Check for joints to harden (30-45 min) & begin initial clean up. Pour plenty of clean water on the joints & scrub pad in a circular motion.
8. Draw a Clean, wet towel across the tile surface to remove residue. Repeat as necessary rinsing the towel frequently in a pail of clean water until the oily feeling has gone.
9. Change water frequently.
10. After 2-3 hours joints will begin to stiffen, if rough or uneven, dress lightly with a sponge or gloved finger soaked in a soap solution to make smooth.
11. Finally clean the tile surface with water and soap solution after 12-24 hours of grouting to remove epoxy haze.

# Benware®

EPOXY

## Two-Parts High Performance Epoxy Grout

Stainfree Grout for  
Floor & Wall Tiles



**Fields of Applications :** Suitable for resistant installation and grouting of floor and wall tiles and mosaic in interiors and exteriors with grout joints between 2 to 15 mm wide. such as : Floor and wall tiles in general. Floor and wall tiles in bathrooms and showers, Under Floor heating. Kitchen counter tops, Terraces and balconies.

EPOXY GROUT can be used for the grouting of ceramic tiles in environment submitted to direct contact with foods, like workbench of meats, dairy products of floor, basin for fish breeding, workbench in restaurant and bakeries. Suitable for applications where surface are exposed to aggressive chemical substances such as dairies, laboratories, pubs,

**Precautions :**

After application cover the Epoxy Grout with a transparent Plastic Sheet to protect from site traffic and dust for at least 12 Hours. High temperature may require for early cleaning.

TRAFFIC: Open to foot traffic - 24 hours.

Open to Heavy traffic - 72 hours.

NOTE : The above is a general procedure for applying HIGH PERFORMANCE EPOXY GROUT

Manufactured by :  
Asian Chemical Industries (Regd.)  
(AN ISO 9001 : 2008 Certified Company)  
Plot No. 24-A, Industrial Area, Bhagwanpur.



Packed & Marketed by :

**BENWARE - INDIA**

www.benware.in

**FEATURES :**

Stainfree	Strong and Durable	Temperatures Resistant
Easy to Install & Clean	No Cracking and powdering	Anti-bacterial
Color-Fast	Acid/Chemical Resistant.	Anti-Fungal

Coverage : Approximate Sq. ft. coverage per Kg.

TILE SIZE	JOINT WIDTH						
	(2mm)	(3mm)	(4mm)	(5mm)	(6mm)	(8mm)	(10mm)
100 x 100 x 3mm	52	35	26	20	18	13	11
150 x 150 x 4mm	58	39	29	22	20	15	12
200 x 150 x 5mm	52	35	27	20	18	13	11
150 x 300 x 6mm	62	41	31	22	20	16	13
300 x 300 x 6mm	78	52	39	28	26	20	16
450 x 300 x 7mm	81	54	40	29	27	20	16
600 x 600 x 8mm	398	265	199	138	133	100	80
600 x 450 x 8mm	116	78	58	40	38	29	23
600 x 900 x 11mm	405	270	203	140	135	101	81
900 x 900 x 12mm	463	309	232	160	155	116	93

Quantities shown above are approximate and given for estimating purposes only.

Actual job site coverages may vary.

Note : It is always good practice when calculating coverage to allow for 10% additional

Material for waste and spillage.

**HIGH PERFORMANCE EPOXY GROUT KIT CONTAINS**

Part A (Paste)	Part B (Hardner)	Gloves
Scrubber	Sponge	Masking Tape

**Limited Warranty :** Subject to the conditions and limitations states below, warrants this products to be free from manufacturing defects for a period of two years from the date of purchase of the products. As a condition of this limited warranty, you may be required to provide proof of products purchase and use.

**Exclusive Remedy :** The limited warranty is given in lieu of any other warranty, express or implied. There are not warranties, express or implied, including warranties based on sample or oral statements, which extend beyond the description on the face hereof, implied warranties or merchantability and of fitness for a particular purpose are excluded.

**Exclusions :** Company is not responsible for workmanship not in accordance with instructions and industry standard guidelines Cracking due to structural movement, excessive deflection or other failure in the substrate is also not covered.

Company is not liable for any incidental damages or consequential damages, including losses due to delays, incurred by the purchaser or any other party.

**Caution :** This product can be irritating to eyes and skin. Avoid prolonged contact with eyes and skin in case of direct contact with eyes, wash eyes immediately with water and seek medical attention quickly. Do not swallow. Keep Out of reach of children.

**NO SOLVENTS. NON-FLAMMABLE. Store in a dry place. Keep out of reach of children.**

**Net Wt. : 5 Kg.**

(Part A Paste - 900 gm x 5 (4.5 kg.), Part B Hardner - 100gm x 5 (500gm.))

**Color :**

**Batch No. :**

**Mfg. Date :**

**M.R.P. ₹ : 4740/-**  
(Inclusive of all taxes)



USE NO HOOKS


[www.benware.in](http://www.benware.in)

# Benware<sup>®</sup>

\_\_\_\_\_  ... elegant home solution

## PREMIUM ++ TILE ADHESIVE

High Polymer Cement Based Tile & Stone Adhesive

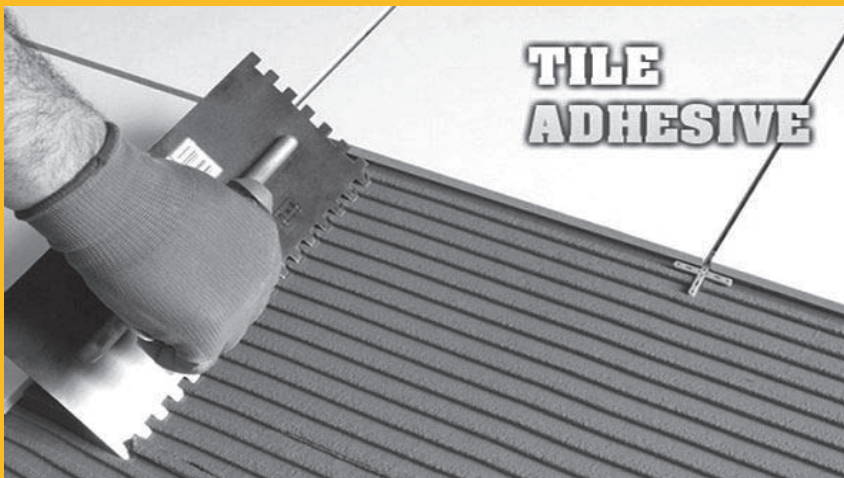

### FLEXIBLE TILE ADHESIVE

High performance, cementitious adhesive. Suitable for installation of all types of ceramic tiles, vitrified tiles, mosaics and stones on floor and walls, interior and exterior.

- ◆ Proven Performance
- ◆ Smooth & Creamy
- ◆ Easy to Apply
- ◆ Maximum Flexibility

## WALL • FLOOR • ELEVATION • CLADDING

- Ready to use, Only water to be added.
- Water Proof.
- Better bond than conventional cement based mortar.
- Self Curing.
- Good Mechanical strength.
- Suitable for fixing Tiles on floor, wall & elevation.
- Best for fixing tile on tile.

## HEAVY DUTY TILE ADHESIVE

**20Kg.**



USE NO HOOKS


[www.benware.in](http://www.benware.in)

# Benware<sup>®</sup>

\_\_\_\_\_  ... elegant home solution

## PREMIUM ++ TILE ADHESIVE

High Polymer Cement Based Tile & Stone Adhesive

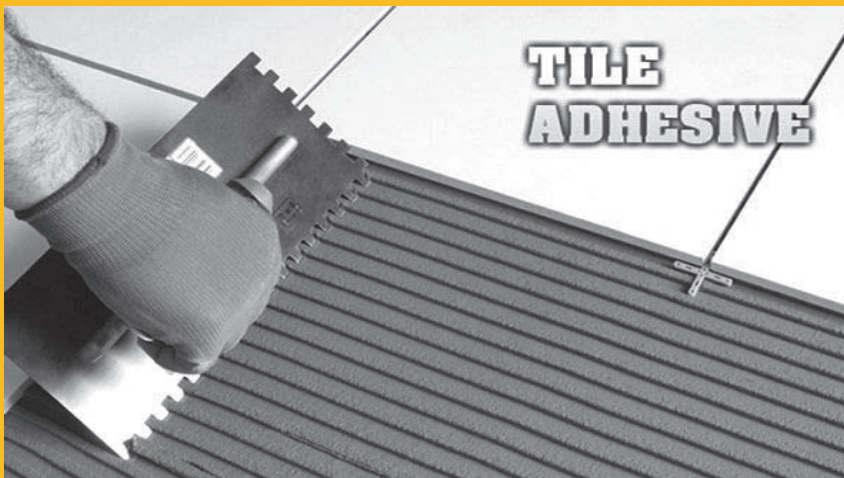

### FLEXIBLE TILE ADHESIVE

High performance, cementitious adhesive. Suitable for installation of all types of ceramic tiles, vitrified tiles, mosaics and stones on floor and walls, interior and exterior.

- ◆ Proven Performance
- ◆ Smooth & Creamy
- ◆ Easy to Apply
- ◆ Maximum Flexibility

## WALL • FLOOR • ELEVATION • CLADDING

- Ready to use, Only water to be added.
- Water Proof.
- Better bond than conventional cement based mortar.
- Self Curing.
- Good Mechanical strength.
- Suitable for fixing Tiles on floor, wall & elevation.
- Best for fixing tile on tile.

## HEAVY DUTY TILE ADHESIVE

**20Kg.**